MODEL ASC24T REV. B2

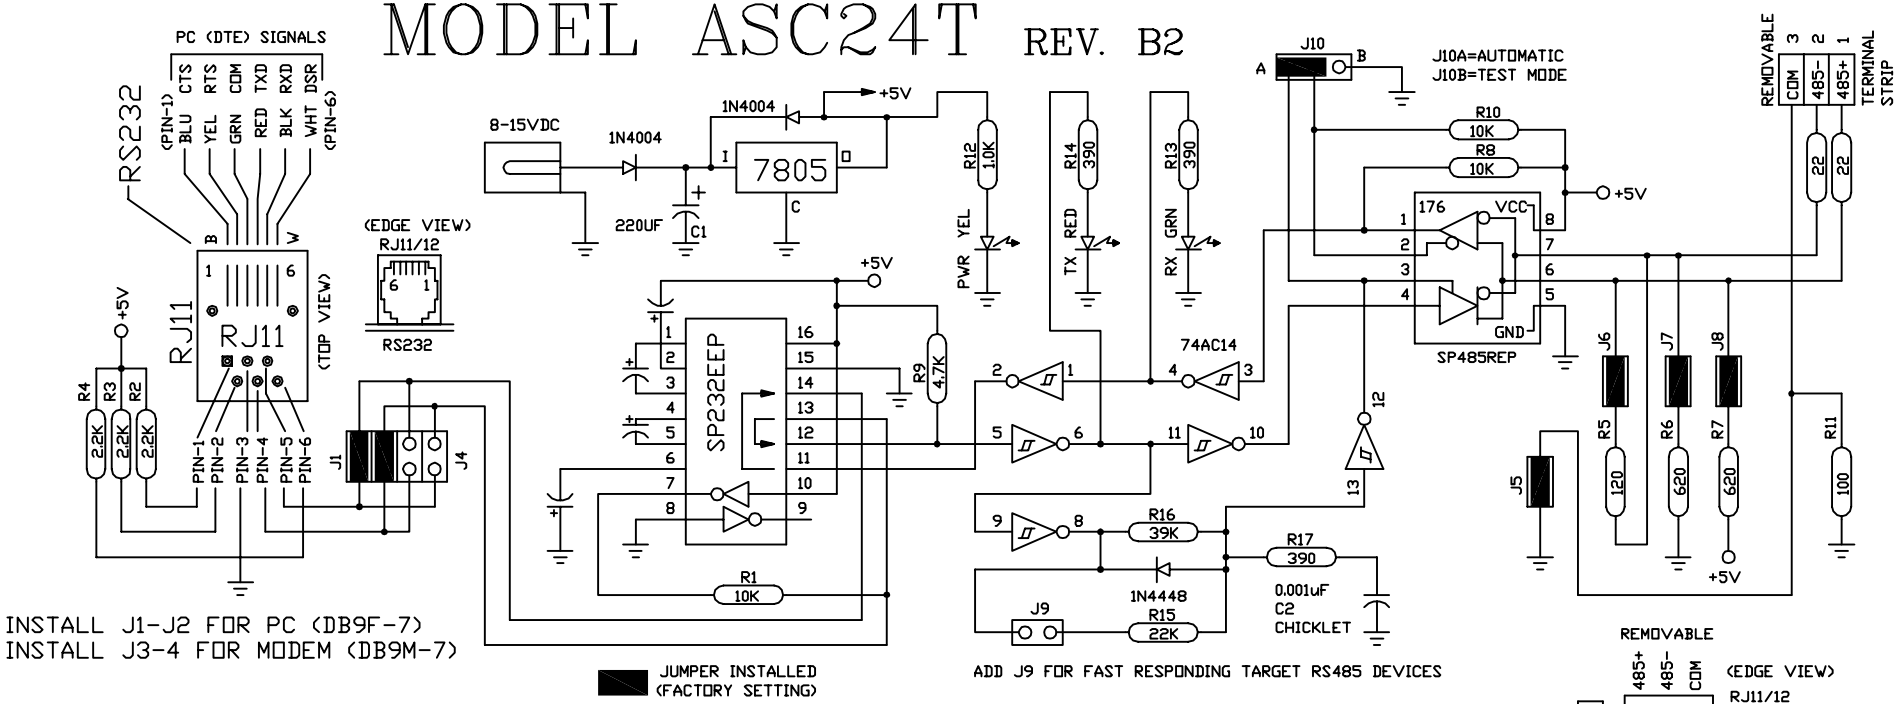

GENERAL INFO.

FAST AUTOMATIC TRANSMIT-ENABLE RS232 TO RS485 CONVERTER FOR 2-WIRE APPLICATIONS AT DATA RATES UP TO 115.2Kbps. LEDs FOR POWER, TX DATA, AND RX DATA. ONBOARD BIAS AND TERMINATION, WITH ONE-TENTH UNIT LOAD HIGH IMPEDANCE SIPEX SP485REP TRANSCEIVER WITH HIGH ESD TOLERANCE. TEST MODE JUMPER, AND IMPROVED AUTO TRANSMIT ENABLE TIMING.

SPECIFICATIONS

1) SIZE: 2.50" X 2.00" X 0.9" (PC BOARD) WITH CONNECTORS: 2.50" X 2.25"
2) MOUNTING HOLES: 4-PLACES 2.00" X 1.50" (#6 HARDWARE)
3) SIPEX SP485REP RS485 DRIVER IC WITH BUILT-IN ESD PROTECTION
4) TEMPERATURE RANGE: -40C TO +85C
5) HUMIDITY: 10-90% RH NON-CONDENSING
6) SPEED: UP TO 115.2Kbps @ 4000ft.
7) OPERATING VOLTAGE: 8-15VDC
8) TYPICAL POWER: UNDER 0.5W
9) HALF-DUPLEX 2-WIRE RS485

ACTUAL SIZE (1:1)

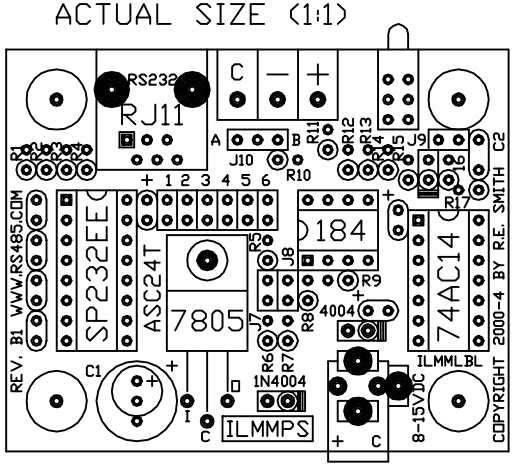

RESmith
WWW.RS485.COM
10330 CHESTER ROAD, CINCINNATI, OHIO 45215
513-874-4796

OPTIONAL ENCLOSURE, CABLE (DB9F OR DB25F), AND POWER SUPPLY ARE AVALIABLE.

This drawing is the property of R. E. SMITH and shall not be used except with the written permission of R. E. SMITH, no copies shall be made of it and all proprietary rights in the matter contained in this drawing are the property of R. E. SMITH.
COPYRIGHT - R. E. SMITH, 2000-2011

DRAWN BY	RES
DATE	4-11-12
SCALE	NONE
CHKD. BY	RES
SHEET 1 OF 1	ASC24T

SUBJECT: RS232<=>RS485
FOR: AUTOMATIC CONV.
R. E. SMITH, 10330 CHESTER ROAD, CINCINNATI, OHIO 45215
DWG. NO.: ASC24T
REV.: B2