


MODEL AT1616L

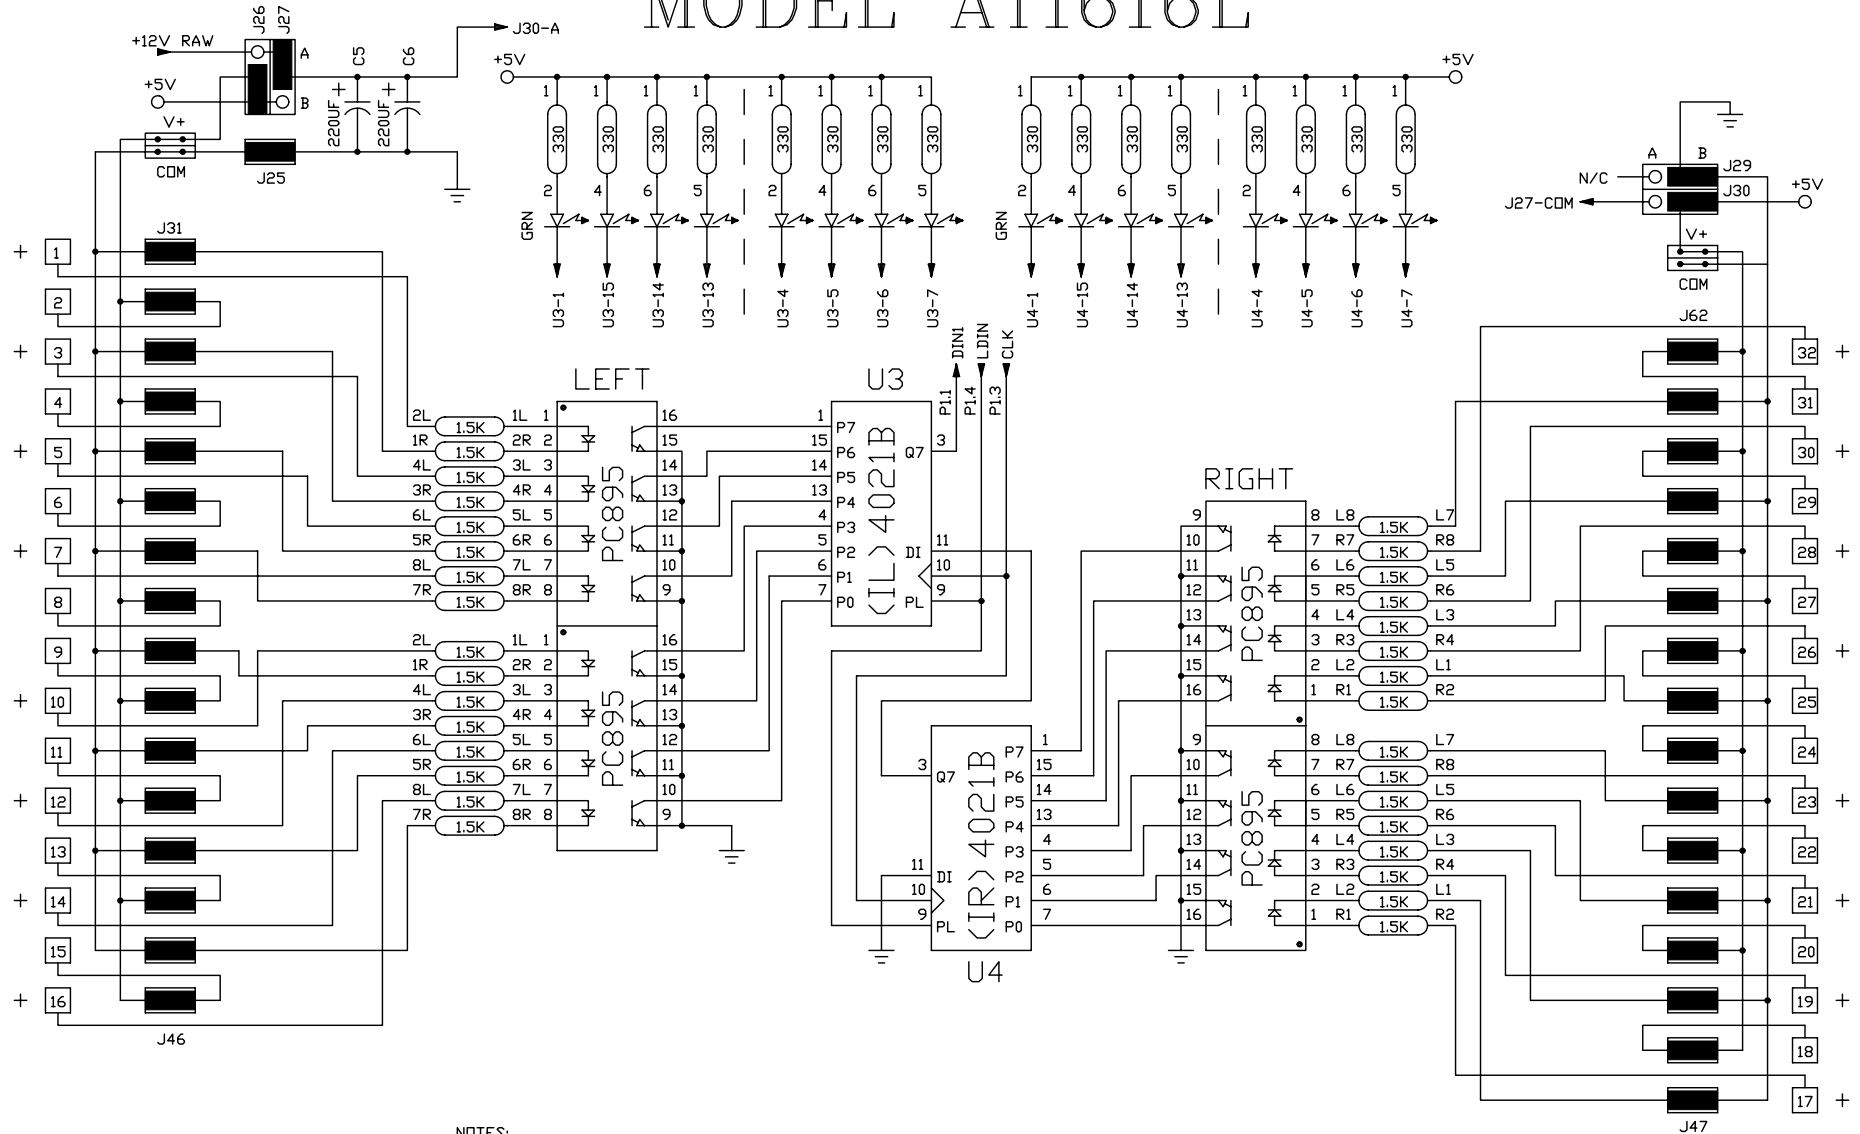

- NOTES:
- 1) MIN ISOLATED INPUT CURRENT = 1.2MA
 - 2) MIN CURRENT TRANSFER RATIO = 20%
 - 3) MAX. POWER (2 RESISTORS) = 0.25W
 - 4) R = 6800 X 2, 18-60V, 1.2-4.5MA
 - 5) R = 5100 X 2, 13-51V, 1.2-5.0MA
 - 6) R = 4700 X 2, 12-48V, 1.2-5.1MA
 - 7) R = 3300 X 2, 9-40V, 1.2-6.1MA
 - 8) R = 2200 X 2, 7-32V, 1.2-7.3MA*(STD.)
 - 9) R = 1500 X 2, 5-27V, 1.2-9.0MA
 - 10) R = 1000 X 2, 3.8-22V, 1.2-11.0MA

This drawing is the property of R. E. SMITH and shall not be used except with the written permission of R. E. SMITH, no copies shall be made of it and all proprietary rights in the matter contained in this drawing are the property of R. E. SMITH.

COPYRIGHT - R. E. SMITH, 1998

SHEET 1 OF 1

AT1616LI

DRAWN BY RES

DATE 8-9-98

SCALE NONE

CHKD. BY RES

SUBJECT 16-IN/16-OUT PCB

FOR INPUT SECTION

RES R. E. SMITH
4311 TYLERSVILLE RD.
HAMILTON, OHIO 45011

DWG. NO.
AT1616LI

REV.
A