


[illegible]

FAST AUTOMATIC AUTO TX-ENABLE
USB TO RS485 CONVERTER FOR
2-WIRE APPLICATIONS AT BAUD
RATES UP TO 230.4K. LEDs FOR
POWER, TX DATA, AND RX DATA.
ONBOARD BIAS AND TERMINATION
WITH ONE-QUARTER UNIT LOAD TI
SN65BLC184N DRIVER IC WITH
SUPERIOR TRANSIENT PROTECTION.
TEST MODE JUMPER, AND IMPROVED
AUTO TRANSMIT ENABLE TIMING.

- 1) SIZE: 2.50" X 2.00" X 1.2" (PC BOARD)
WITH CONNECTORS: 2.50" X 2.50"
- 2) MOUNTING HOLES: 4-PLACES
2.00" X 1.50" (#6 HARDWARE)
- 3) TI SN65BLC184N RS485 DRIVER IC
BUILT-IN TRANSIENT PROTECTION
- 4) TEMPERATURE RANGE: 0C TO +70C
- 5) HUMIDITY: 10-90% RH NON-CONDENSING
- 6) BAUD: 300-230.4K (LIMITED SLEW)
- 7) SPECIAL UNITS TO 921.6KBPS
- 8) TYPICAL POWER: UNDER 0.5W
- 9) HALF-DUPLEX 2-WIRE RS485

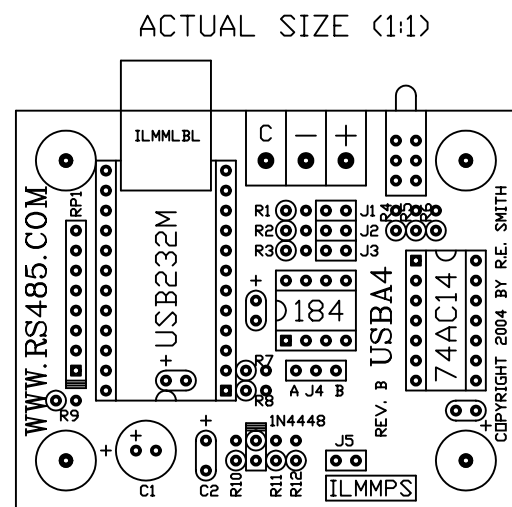

www.rs485.com

This drawing is the property of R. E. SMITH and shall not be used except with the written permission of R. E. SMITH, no copies shall be made of it and all proprietary rights in the matter contained in this drawing are the property of R. E. SMITH. COPYRIGHT - R. E. SMITH, 2000-2004	DRAWN BY RES		SUBJECT USCB=>RS485								
	DATE 7-16-46		FDR AUTOMATIC CONV.								
	SCALE NONE		RES		R. E. SMITH 4301 R. E. SMITH DRIVE HAMILTON, OH 45011		DWG. NO.		REV.		
	CHKD. BY RES				USBA4				B		
SHEET 1 OF 1		USBA4									