


LINK: rs485.com/pxpcom1.html




MODEL XPCOM1 REV. D

ENET 10-100-BASE-T TO RS232/RS485/RS422 CONVERTER TO 115.2KBPS

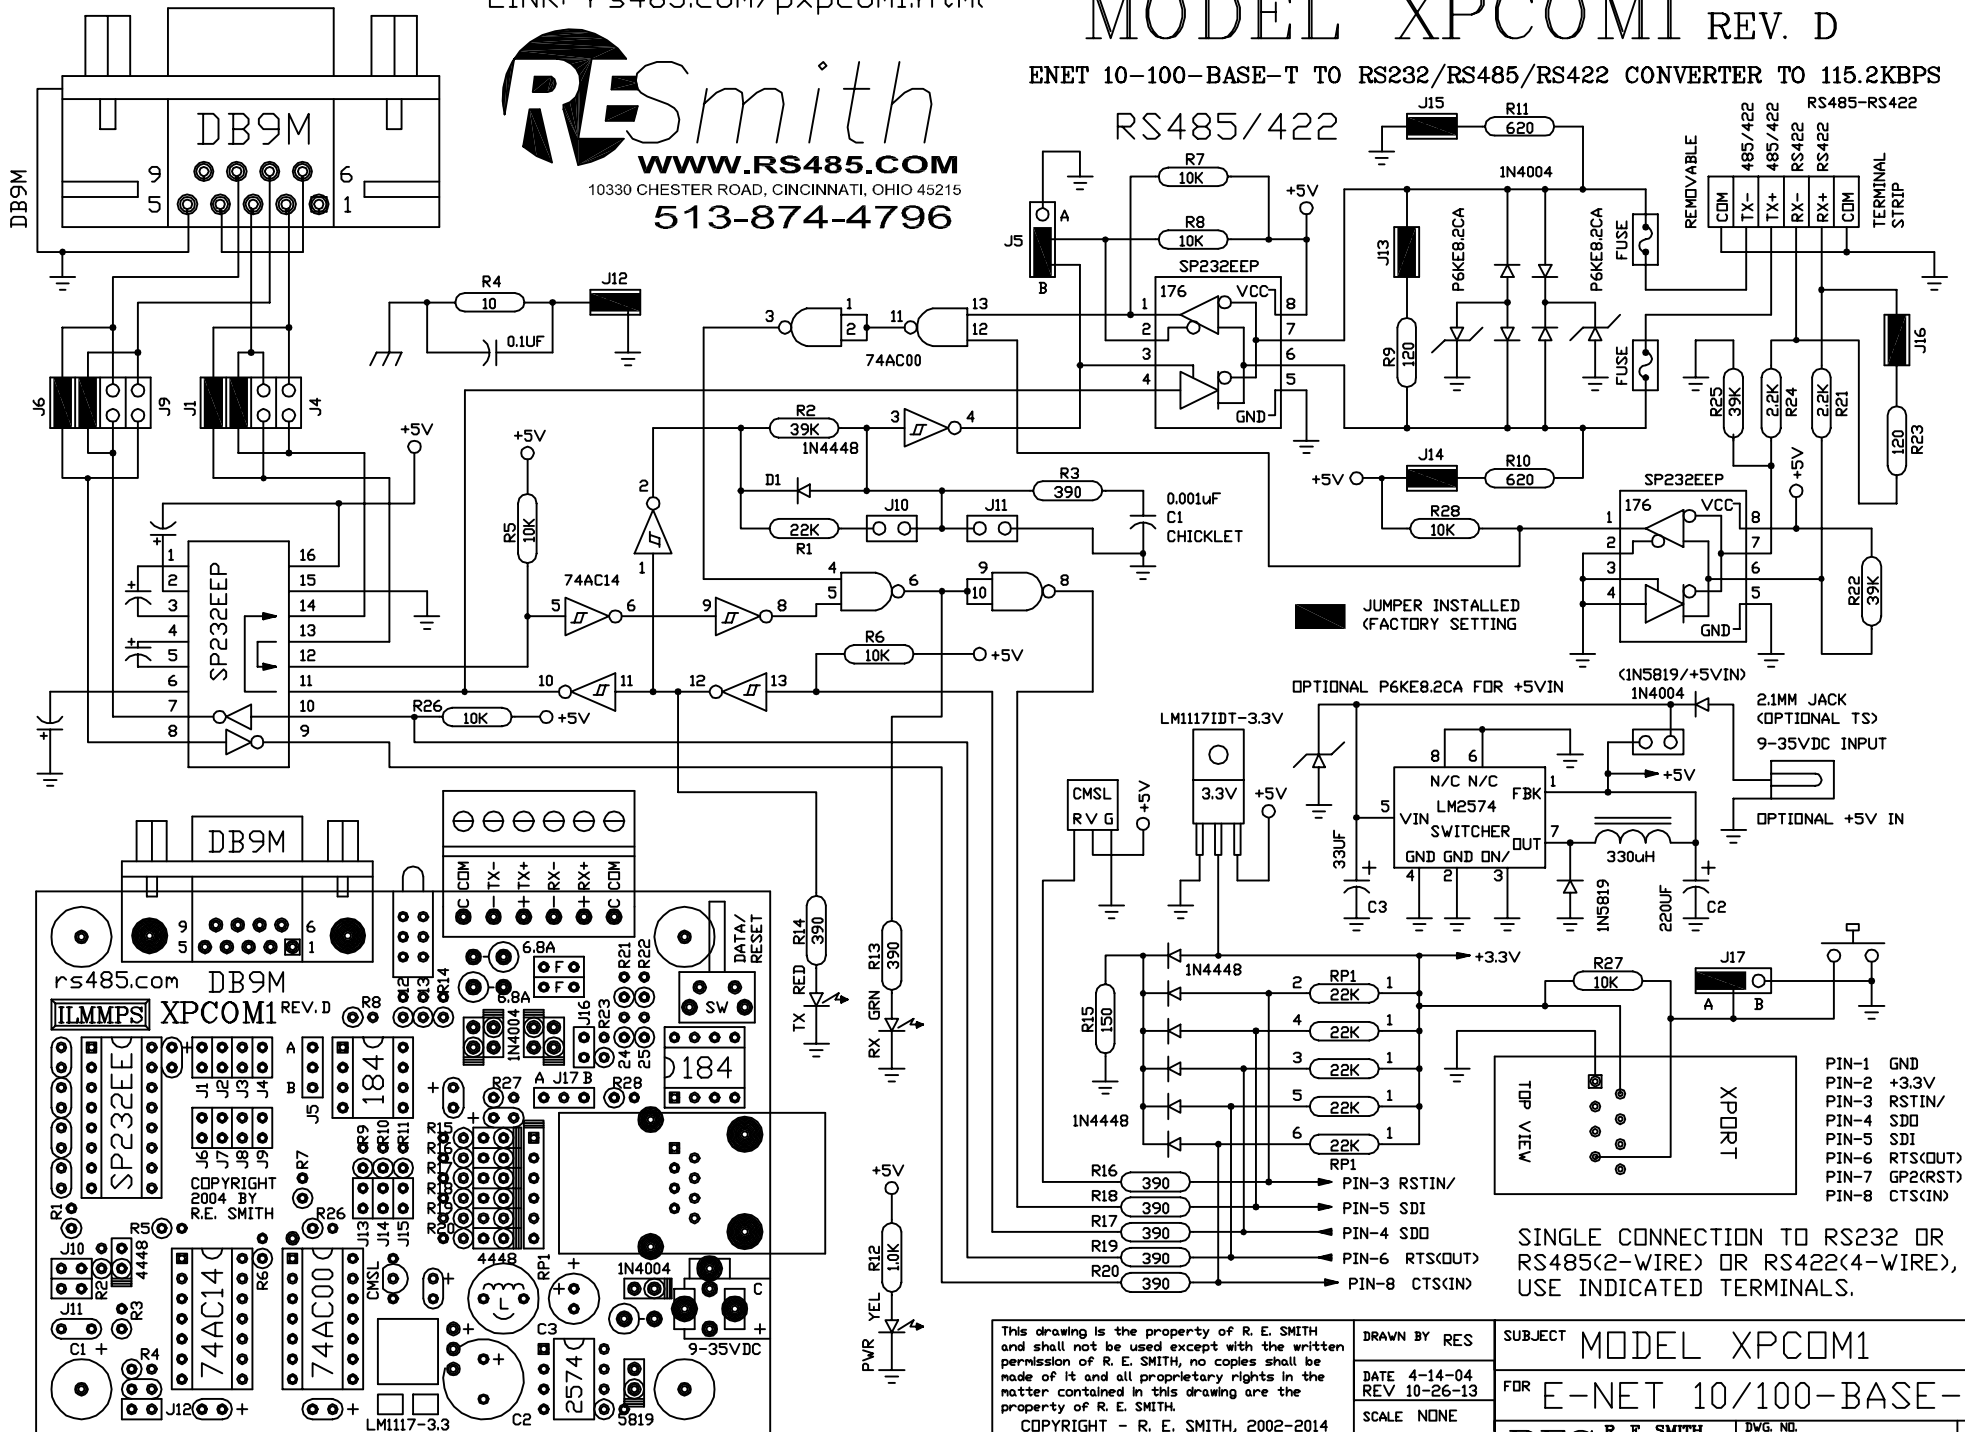

JUMPER INSTALLED (FACTORY SETTING)

OPTIONAL P6KE8.2CA FOR +5VIN
 (IN5819/+5VIN) 1N4004
 2.1MM JACK (OPTIONAL TS)
 9-35VDC INPUT
 OPTIONAL +5V IN

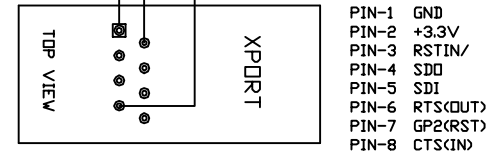

SINGLE CONNECTION TO RS232 OR RS485(2-WIRE) OR RS422(4-WIRE), USE INDICATED TERMINALS.

M1 = 3.50" X 2.75"

This drawing is the property of R. E. SMITH and shall not be used except with the written permission of R. E. SMITH, no copies shall be made of it and all proprietary rights in the matter contained in this drawing are the property of R. E. SMITH. COPYRIGHT - R. E. SMITH, 2002-2014		DRAWN BY RES	SUBJECT MODEL XPCOM1	
SHEET 1 OF 1		DATE 4-14-04 REV 10-26-13	FOR E-NET 10/100-BASE-T	
XPCOM1		SCALE NONE	RES R. E. SMITH 10330 CHESTER ROAD CINCINNATI, OH 45215	
CHKD. BY RES		DVG. NO. XPCOM1		REV. D